


USER GUIDE

ACIS SMARTHOME



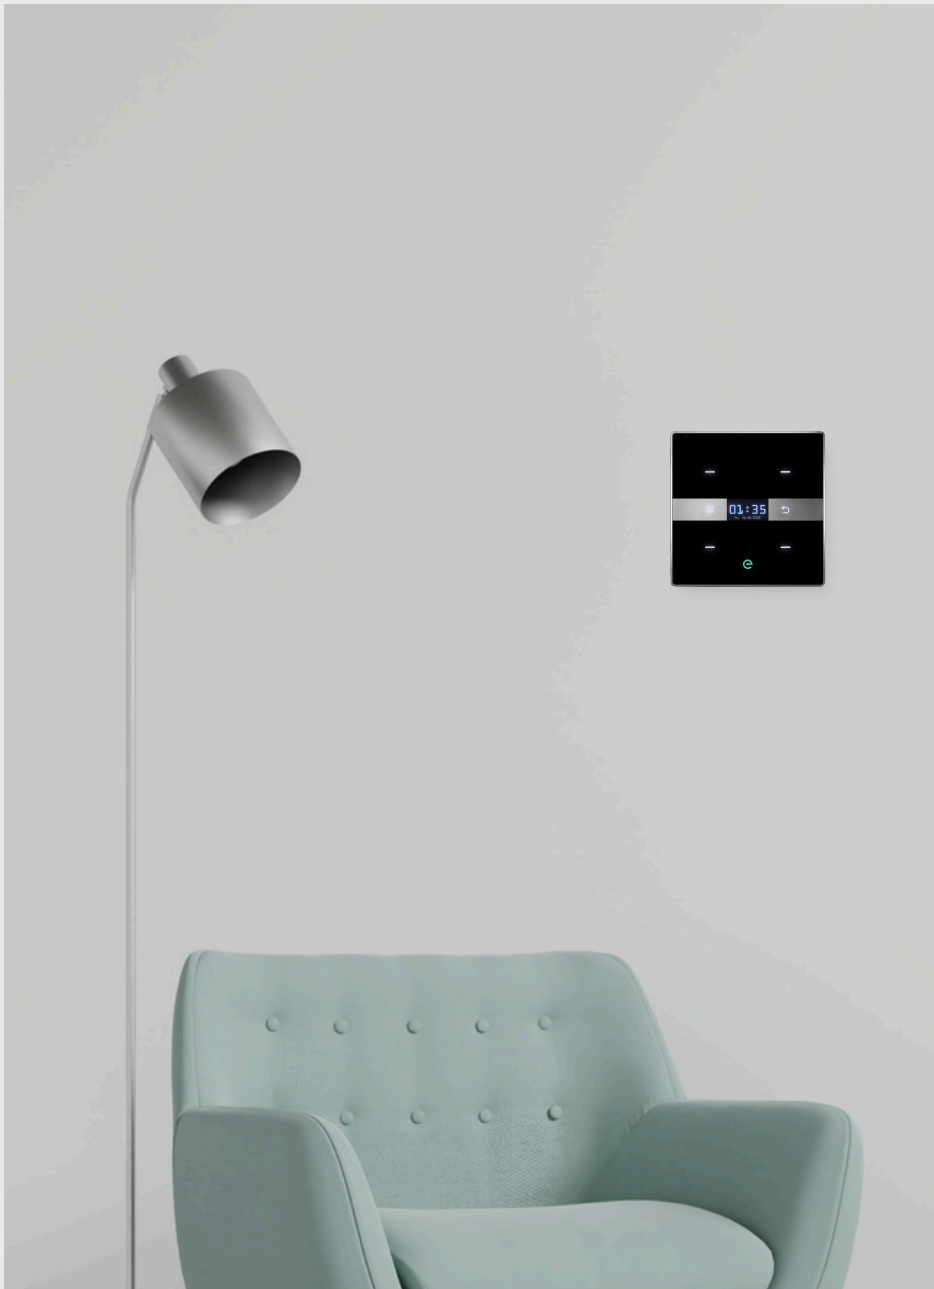

Smart switch:

Lighting control: turn lighting on and off and put it on timers (downlights, track lights, chandeliers, decorative lights).

Scene control (on the same switch): instead of controlling each lighting line on its own, create scenes that follow your daily routine. Scenes are assigned to the buttons of the lighting switch panels. Up to 4 scenes can be created.

Examples:



Dinner scene: downlights and track lights off, backyard curtains open, chandelier on, AC on at 24 °C



Bedtime scene: all ground-floor lights and AC off, bedroom AC on at 26 °C, security devices armed.

HOW TO USE THE DEVICE



Press a device button to turn it on/off (lights, fans, curtains, AC...). The screen also shows the name of that light.



Press Menu to switch to the scene control screen; press Menu again to go back to controlling each lighting line.

Smart switch:

Lighting control: turn lighting on and off and put it on timers (downlights, track lights, chandeliers, decorative lights).

Scene control (instead of lighting control): instead of controlling each lighting line on its own, create scenes that follow your daily routine. Scenes are assigned to the buttons of the lighting switch panels. Up to 8 scenes can be created.

Examples:




Dinner scene: downlights and track lights off, backyard curtains open, chandelier on, AC on at 24 °C




Bedtime scene: all ground-floor lights and AC off, bedroom AC on at 26 °C, security devices armed.



HOW TO USE THE DEVICE

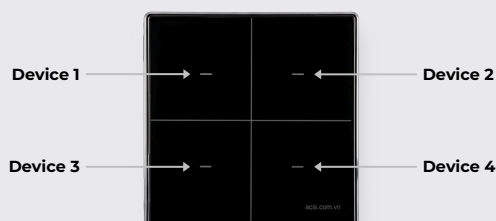

Or

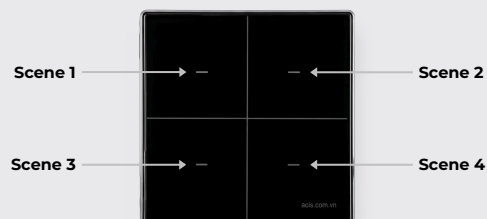

Press each device button to turn it on/off (lights, fans, curtains, air conditioners...).

Press each button to run the scene that has been set up.



Smart switch:

Lighting control: turn lighting on and off and put it on timers (downlights, track lights, chandeliers, decorative lights).

Scene control (instead of lighting control): instead of controlling each lighting line on its own, create scenes that follow your daily routine. Scenes are assigned to the buttons of the lighting switch panels. Each button can hold one scene (up to 2 scenes).

Examples:




Dinner scene: downlights and track lights off, backyard curtains open, chandelier on, AC on at 24 °C




Bedtime scene: all ground-floor lights and AC off, bedroom AC on at 26 °C, security devices armed.

HOW TO USE THE DEVICE

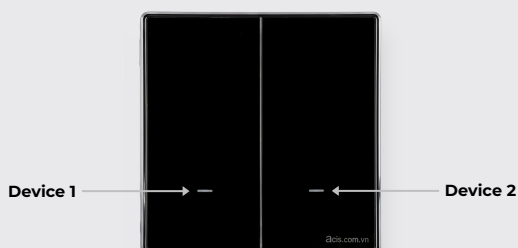

Or

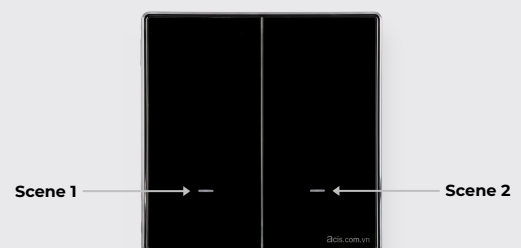

Press each device button to turn it on/off (lights, fans, curtains, air conditioners...).

Press each button to run the scene that has been set up.

Smart switch


Air conditioner control: each switch controls one air conditioner. Turn it on/off and adjust the temperature and fan speed on the switch, or control it remotely from your phone.



HOW TO USE THE DEVICE




Press the buttons on the device to turn the air conditioner on/off and raise or lower the temperature; tap the fan speed button to change the fan level.

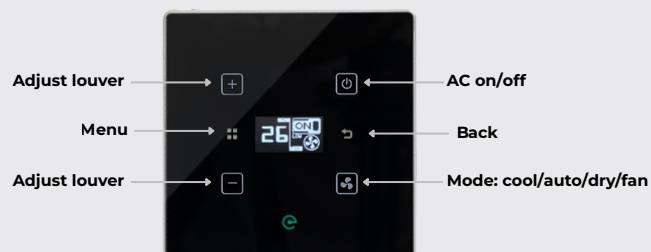

Press **Menu** to switch to louver up/down control and the cool/auto/dry/fan modes.


HOW TO USE THE 3D INTERFACE

Use a picture of your own home to control devices right where they are: lighting, air conditioners, curtains, gates, door locks...

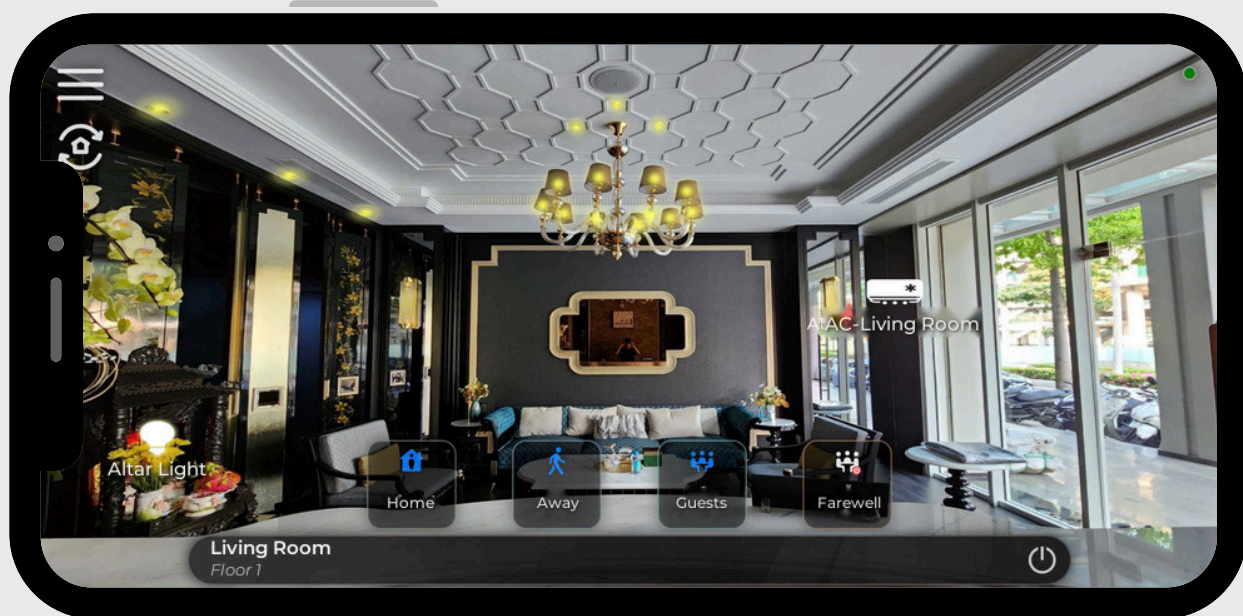


Swipe left/right to change rooms

- Tap a device or its icon to control it
- Tap a scene tile to run the scene
- Tap the power icon  to turn everything off or on

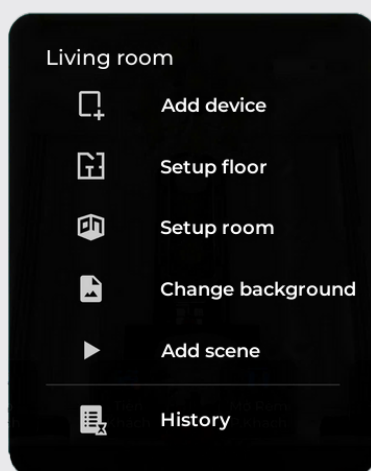


General settings

Press and hold an empty part of the screen to open the settings above.

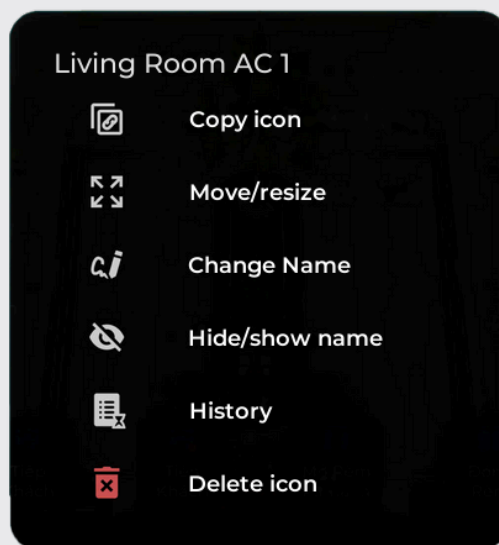

Device settings

Press and hold a device or its icon to open the settings above.

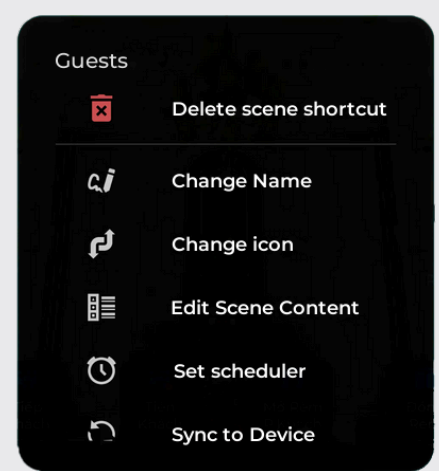


Scene settings

Press and hold a scene tile to open the settings above.

HOW TO USE THE IHOME ACIS APP

Device control screen

Device control screen: shows your devices just as they are installed: lighting switches, curtain switches, air-conditioner remotes, gate remotes, cameras and door sensors.

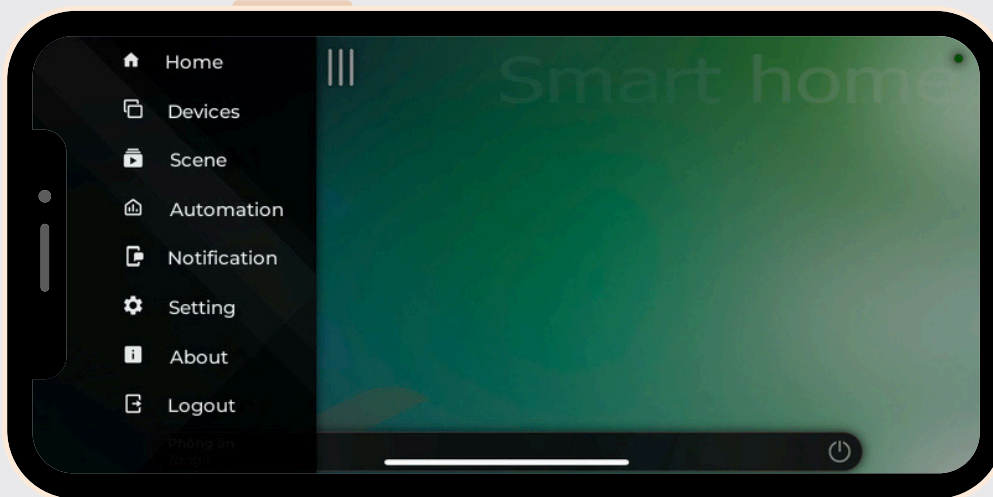

1 - On the main control screen, tap the menu



2 - Select "Devices"



Devices you can control in the 2D view

Lighting switch

Tap

Press & hold

Settings for each device

Settings for each line of the device

Curtain control

LR Curtain 1

AC control

Living Room AC

Floor 2 Bedroom

Alarm control

Burglar Alarm

Presence sensor

Ramp Sensor

Camera Hikvision

Gate Camera

High-load control

Kitchen Camera Power

Roller door control

Roller Door

Gate control

Gate

Door sensor

Basement Ramp

Lets you **control** each device
or **set it up in detail**


HOW TO SET UP SCENES

Create up to 50 scenes that control many devices at once, to match your daily routine.

1 - On the main control screen, tap the menu




2 - Select "Scene"

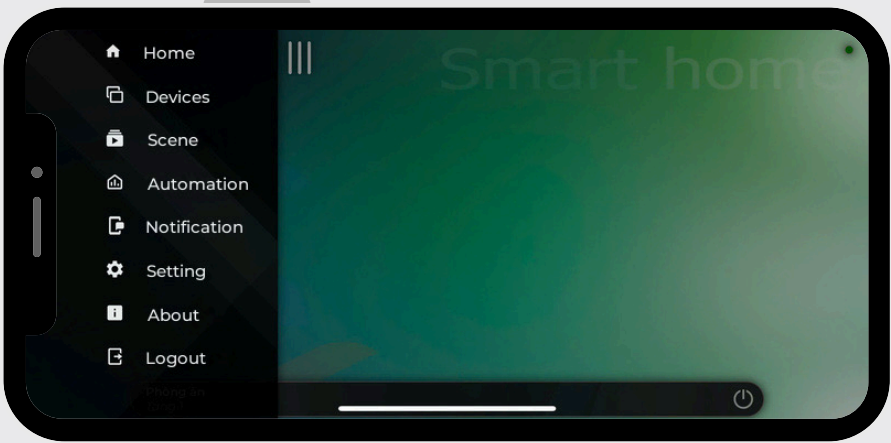


- Tap the scene you want to run

- **Create a new scene**

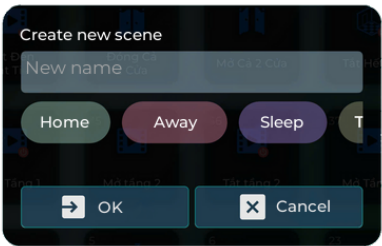


Enter the scene name



Once created, the new scene's icon tile appears

Press & hold



Scene feature settings




A synced scene has a blue icon

Sync to device




A newly created or unsynced scene has a white icon

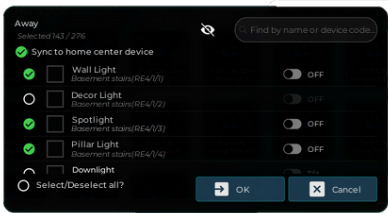

Set up the scene content
Choose the devices and their states


COMMONLY USED SETTINGS

Rename

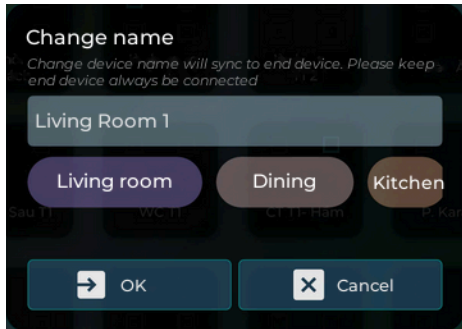


- Press and hold a device tile or one of its lines to rename it
- Enter the new name and tap “OK”

View history

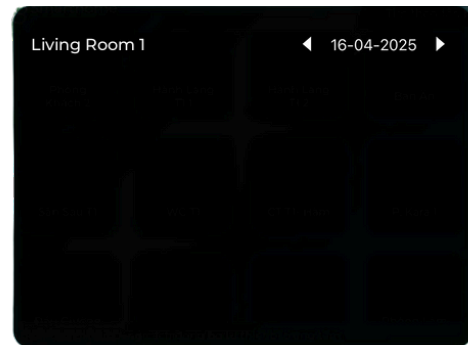


- Press and hold a device tile or one of its lines to view its history
- Tap the arrows or the date to choose the day you want to see

Timer

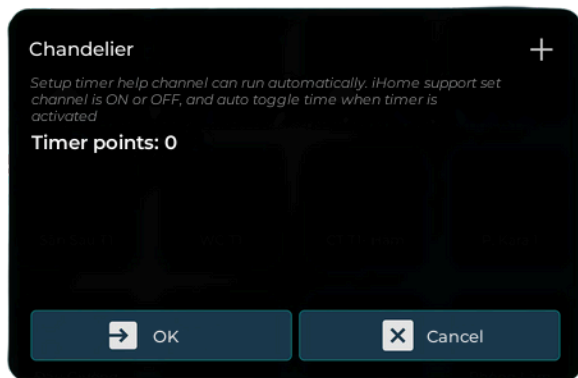


- Press and hold a device tile or one of its lines to set a timer
- Tap “+” to add a timer

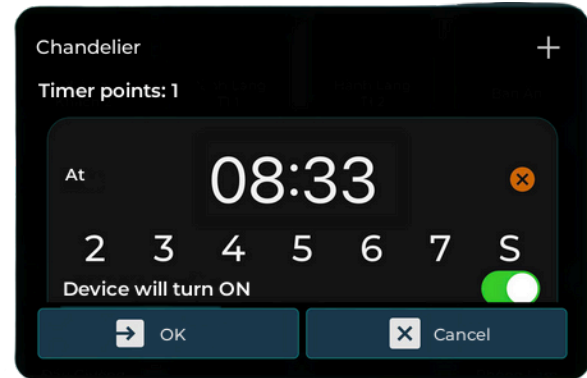

- Choose the time and the days of the week, then tap “OK”


Delete a device/scene




- Press and hold a device tile or one of its lines to delete it
- Tap “OK” to confirm

HOW TO CHANGE PASSWORD


Step 1: Choose “Setting” ⚙️ to open the password change screen

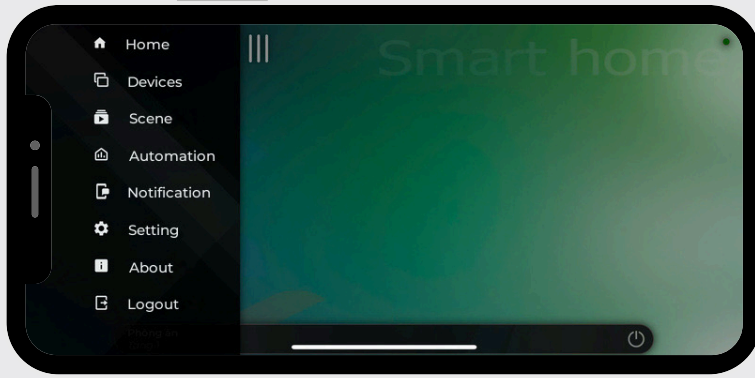


Step 2: Select “Change master account”




Step 3: Re-enter your current password (the one you sign in with)

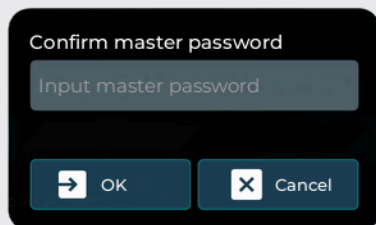

Step 4: Enter the new password and tap “OK” to finish

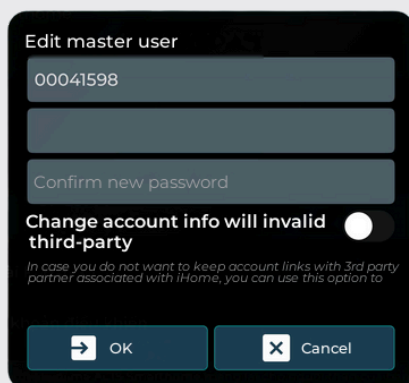

**** Note:** after the password is changed, links with related third-party services must be set up again. To keep the settings with the voice assistants (OLLI MAIKA), choose NOT to unlink them.

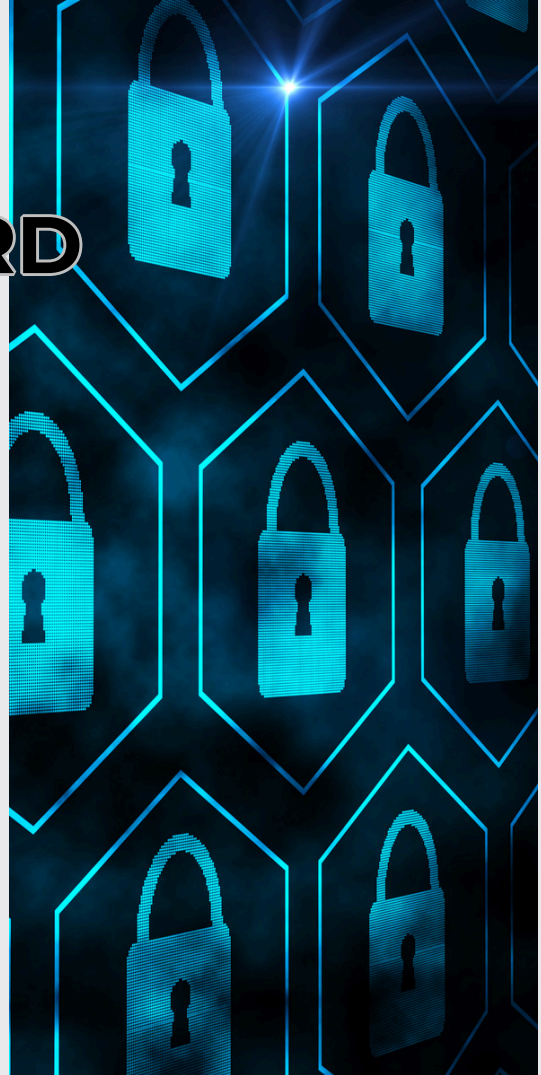

HOW TO SET PERMISSIONS


Account permissions means creating sub-accounts that let other people control all or some of the devices in your smart home. The owner account (master account) can also see which account controlled a device, by checking the history or by getting a notification each time a device is controlled.

Examples:


- “Sub-account for the children” – lets the children control their own rooms, or the gate and doors so they can come and go.
- “Sub-account for the housekeeper” – lets them open certain areas such as the gate, doors and shared spaces.

Setting permissions


Step 1: Choose “Setting” ⚙️ to open the settings screen

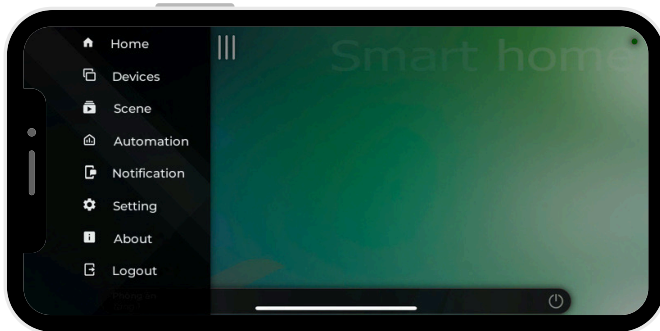


Step 2: Select “Change control users”




Step 3: Add an account with a user name and password, then select it to set its permissions

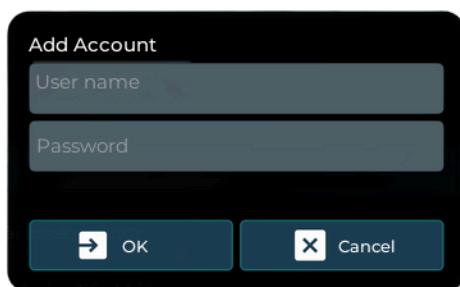

Step 4: In the settings menu, select “Set permission”

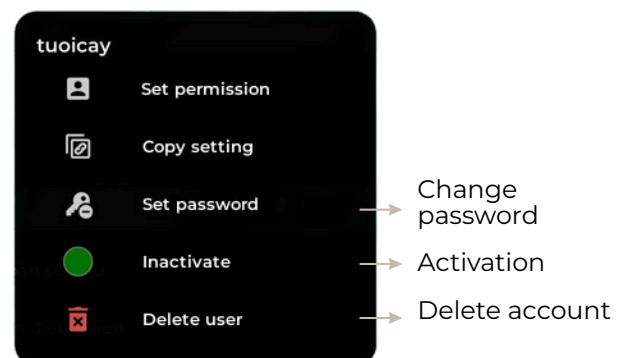

Step 5: Choose what this account may control and tap “OK”

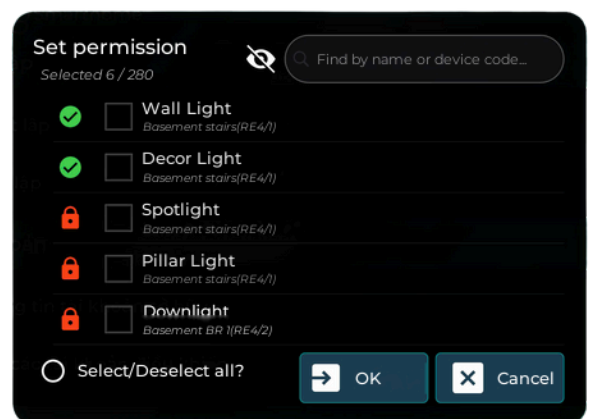

SUPPORT INFORMATION



Our customer support website helps you quickly. You can also find answers and product information there.

Thank you for your trust
in choosing ACIS products
and services

